


X-Loupe®

Ultra Close-up Ringlike Lighting

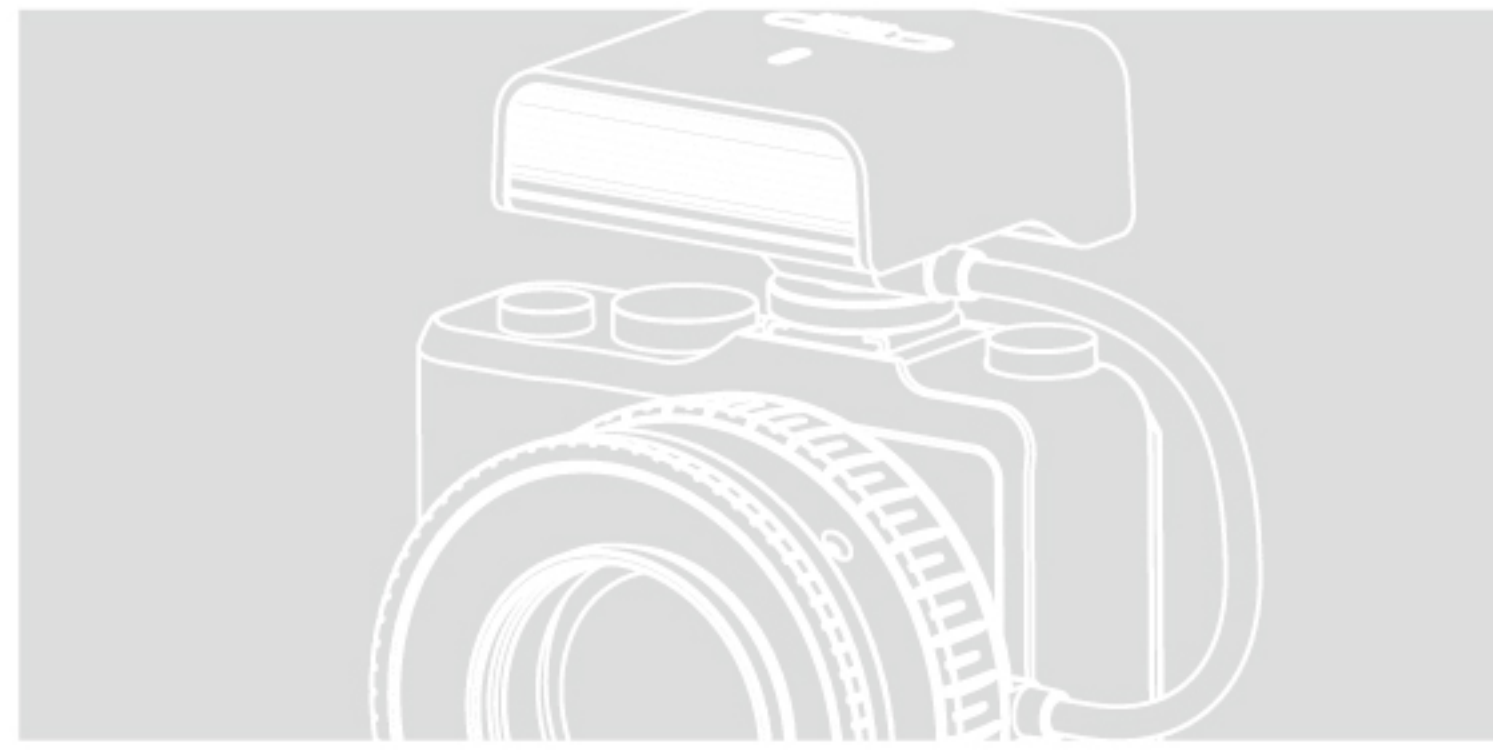

X-Loupe® UCRL_White-light Specification

Item	Specification
Light source	0.3W high-CRI 6000°K LED (x16) 0.12W 3000°K White-light LED (x32)
Color Gamut	6000°K : NTSC 85% ; 3000°K : NTSC 65%
Color Temperature	White : 6000°K±10% ; Warm white : 3000k±10%
Life span	10000HRs
Luminance (For best angle of the light source)	Front of Lens ; Front of Lens ; Front of Lens
luminance modulation	4 segments control function provides 9 kinds of lighting mode
Filter ring diameter	49 mm
Filter light category	Transparent (Full light) ; Milk white (Threads of Light)
modulate Range	0~100% 6 digital settings for luminance modulation
Display	luminance modulation Status ; Light Status, ; Battery Status
Current Consumption (general light)	650 mA
Battery	1700mAh Li-ion Rechargeable battery (Ricoh DB-90 compatible)
Battery Duration	(general light) Around 2.5Hrs
Max. Dimension (mm)	110*83*130mm
Weight	620 g
Operation Environment	0-40°C
Declaration of conformity	FCC 、 CE

<This specification is for the reference only. Further revision will no be notified.>

台北市116文山區萬和街8號7樓
7th floor, No.8, Wanhe St., Wenshan District,
116 Taipei City, Taiwan, R.O.C.
TEL:886-2-2230-1168 FAX:886-2-2239-2112
e-mail:service@lumos.com.tw
<http://www.x-loupe.com> <http://www.lumos.com.tw>


Lumos Technology Co. Ltd.
承奕科技股份有限公司